


# Beards Don't Filter Coronavirus Picture This

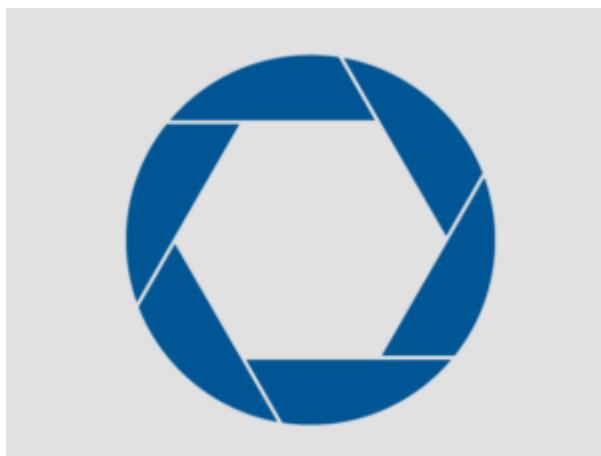

No matter what style of facial hair you sport, it's our humble opinion that all beards are beautiful. The Centers for Disease Control and Prevention (CDC), however, disagrees.

Not all facial hair is created equal, according to a CDC infographic on the best facial hair styles suited to N95 respirator masks, which are intended to help shield you from airborne particles.

According to the U.S. Food and Drug Administration (FDA), an N95 respirator blocks at least 95 percent of very small airborne particles down to 0.3 microns (one micron =

one millionth of a meter). Gases, vapors, and other particles in the air that respirator masks are meant to prevent the wearer from breathing in will take the path of least resistance to bypass the respirator's filter.



So, what's the problem with your beard? Can't that just act like another barrier?

Not exactly. While human hair "appears to be very thin to the naked eye," according to the CDC, it's actually much larger in size than the particles you want to avoid inhaling. N95 masks protect you from airborne particles down to 0.3 microns, but hair thickness ranges from 1/1500 to 1/500 of an inch in diameter. So if we assume each of your beard hairs are .002 inches thick in diameter, that translates to 50.8 microns. That's going to create a COVID-19 size entryway.

Overall, the CDC reports that any presence of facial hair that gets in the way of a respirator mask's seal can cause 20 to 1,000 times more leakage as compared to a clean-shaven mask-wearer.

### Fit Testing

If you've ever performed QNFT (quantitative) respirator fit testing, you know that the process can sometimes be challenging and interspersed with occasional failed results which require you to retest.

The reason we perform respirator fit testing is to verify that the user can obtain an effective seal and level of comfort with their chosen respirator. We also want to make sure that the respiratory protection being worn provides the user with the best possible protection when required. The fit test is an opportunity for the user to demonstrate their level of competence with donning, doffing, and user seal check training. CSA Z94.4 requires that we repeat the test every other year or when there is a change to the respirator, physical condition of the user, or PPE being worn.

Here are some tips, tricks, and basic troubleshooting suggestions that we have learned over the years to help with your QNFT fit testing program.

- **A 3M disposable respirator with valve.** So many masks to choose from, so many faces to fit. There is no such thing as one size fits all. A common reason that N95 respirators don't fit (besides being too big or too small) is that the metal nose piece isn't properly fitted. Once a respirator is chosen, proper donning procedures will instruct users to use two hands (two fingers on each hand) to form the metal band evenly over their nose. Using one hand (thumb and index finger) can create an uneven bend resulting in a respirator leak.
- **Filtering Facepiece (N95) Probe Placement** A fit testing probe needs to be installed in order to conduct a fit test on a filtering facepiece respirator. Respirator leaks can be created when installing this probe. It is important that the probe be installed to the left or right of exhalation valves and away from seams in respirator material. Start by inserting the probe to the midway point on the inside of the facepiece. Then, continue while applying pressure on the sealing push nut/rivet. When done correctly, respirator material should be seen around the joint of the 2 components.
- **Beards** First off, CSA Z94.4 stipulates that no facial hair may come into contact with the seal area of the respirator. Annex M in the Standard provides guidance on what is acceptable. Basically, if facial hair is – or could be – in the mask sealing area, you can't conduct a fit test.

## Maintenance & Hygiene

Everyone is aware of the potential transmission of germs and bacteria via our hands. If you're fit testing, here are some useful tips to for the safety of the fit tester and respirator user.

- Wear disposable non-latex gloves when handling someone else's respirator
- If a shared "test" respirator needs to be wiped out between uses, have the person being tested do the wiping. If they bring their own respirator for the test, offer a wipe so it can be cleaned. This promotes respirator hygiene and provides a clean respirator for the test.
- Always verify that all components of the respirator are in place prior to the fit test.
- When putting a mask adapter on a respirator, use new, clean tubing to go from the mask adapter to inside the mask. The fit test adapter kits come with replacement tubing and additional can be ordered as needed.
- Occasionally, moisture can condense in the twin tubes between the respirator fit tester and the mask adapter. This occurs because exhaled breath is humid and can condense in the hose during testing. The easy solution is to carry a spare, 'clean' twin tube that you can swap out on demand. They can also be cleaned and dried as necessary.

## Fit Test

the responsibility of the employer

**Required** in all industries where tight-fitting facepieces are used as a control measure

Faces can vary widely in shape, size and proportion, so selecting the correct model is vital for safe fit

Protection relies on achieving a **good seal** between the facepiece and the wearer's face

Tight-fitting respirators should be tested: disposable respirators, reusable half masks and reusable full-face masks

**Fit Testing** should happen during the initial selection of RPE, before being worn in a hazardous environment

The most common **Fit Test** methods are the Qualitative Taste Test and Quantitative Particle Counting Device

## Fit Check

the responsibility of the wearer

The practice of the wearer **checking** their respirator for fit every time it is used


Work-related respiratory disease may be reduced when workers **understand** how to check that their device is positioned correctly

**Fit Checking** is not a regulatory requirement but should be regarded as good practice by the wearer

It is important for users to be **trained** in the technique required for their model of respirator

Following a successful fit test, the wearer is responsible for checking for fit **every time** the respirator is put on

When fit checking, wearers use negative and positive **pressure** techniques to judge the quality of fit

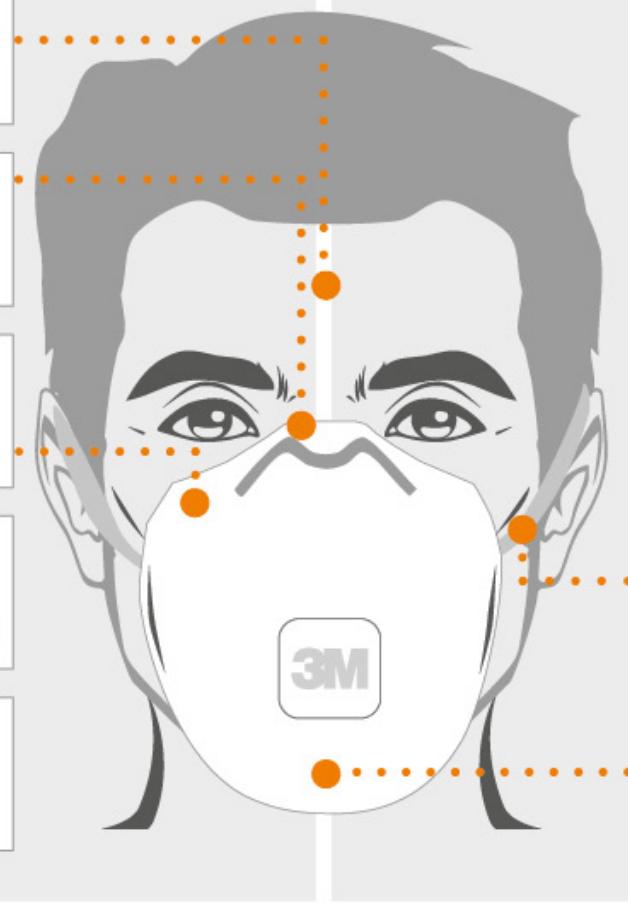

## Smoking

Smokers inhale a lot of particulate, but it can take at least 30 minutes for all those small particulates to migrate out of the lungs. If you test too soon after smoking, the instrument will count those particles and won't be able to tell if it's a leak or cigarette smoke that is resulting in particles showing up in the test.

## Equipment Failure

Sometimes the equipment doesn't work. Not often, but not never. Remember, it's drawing air in when it's turned on, so never let the hose fall to the floor without a filter on it. Dust bunnies are bad for the optics. So is bouncing and bumping – sometimes this causes an optics misalignment to occur, so the instrument stops counting particles.

# Three Key Factors Required for a Respirator to be Effective



**Correct\***




**Incorrect**

① The respirator must be put on correctly and worn during the exposure.

② The respirator must fit snugly against the user's face to ensure that there are no gaps between the user's skin and respirator seal.



③ The respirator filter must capture more than 95% of the particles from the air that passes through it.

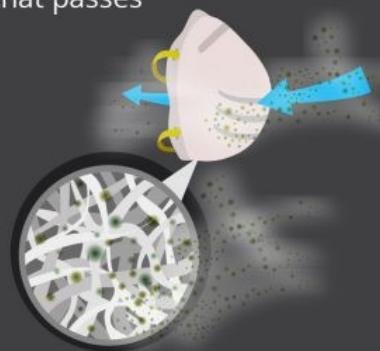

\*If your respirator has a metal bar or a molded nose cushion, it should rest over the nose and not the chin area.

## Sources

<https://blogs.cdc.gov/niosh-science-blog/2018/01/04/respirators-public-use/>

<https://www.popularmechanics.com/science/health/a31119260/cdc-coronavirus-facial-hair-chart/>

<https://blogs.cdc.gov/niosh-science-blog/2017/11/02/noshave/>

[https://safetynetwork.3m.com/blog/wp-content/uploads/2017/10/J402922\\_SG\\_PSD\\_18\\_Respirator-poster-amend\\_2017\\_PRINT\\_POSTER-FV.jpg](https://safetynetwork.3m.com/blog/wp-content/uploads/2017/10/J402922_SG_PSD_18_Respirator-poster-amend_2017_PRINT_POSTER-FV.jpg)

<https://www.levitt-safety.com/blog/respirator-fit-testing-basic-troubleshooting/>